

HARVIA LEGEND

HPO110400M

The Harvia Legend provides you with the ultimate sauna experience. This large heater takes you back to the origins of heaters – it is a heater in its purest form. The patinated steel frame of the Harvia Legend contains a large amount of stones that gives off great steam even in large saunas as it heats up. Due to the open structure of the stone compartment, you can throw water on the entire outer surface of the heater. The heat charged in the large number of stones allows you to throw more water even at a lower temperature – you can enjoy delightfully humid steam in your sauna. Due to its circular shape, the Harvia Legend heater can be installed in the middle of the sauna or embedded into the bench. The heater is controlled by a separate control unit.



Features

Main material : Steel

H x W x D : 740.0 x 530.0 x 530.0 mm

Net weight (kg) : 29.5


Installation location : Floor

| ID | GTIN | Output (kW) | Sauna room size min - max m3 |
|------------|---------------|-------------|------------------------------|
| HPO110400M | 6410082611003 | 11 kW | 9.0-20.0 |

Related products



SASP0241



SFE-D530



SASL2M



SASP0241



SASP0241L


Spare parts

| Product | ID | Pcs |
|----------------------------|---------|-----|
| Heating element 2150W/230V | ZSP-240 | 3 |
| Heating element 1500W/230V | ZSS-110 | 3 |


Technical details

| Technical data | Type / attribute | HP0110400M |
|------------------------------------|--|------------|
| | Color | Black |
| | Power output | 11 kW |
| | Stone amount (kg) | 120 |
| Dimensions | Product width | 530 |
| | Product height | 740 |
| | Product depth (mm) | 530 |
| | Net weight (kg) | 29.5 |
| | Gross weight | 32 |
| | Package width | 550 |
| | Package height | 770 |
| | Package depth | 545 |
| Safety and installation dimensions | Safety distance front (non-combustible materials) | 100 |
| | Safety distance front (combustible materials) | 100 |
| | Safety distance right side (combustible materials) | 100 |
| | Safety distance right side non-combustible materials | 100 |
| | Safety distance left side (combustible materials) | 100 |
| | Safety distance left side non-combustible materials | 100 |
| | Safety distance side (non-combustible materials) | 100 |
| | safety distance to the side wall (combustible materials) | 100 |
| | Safety distance behind (non-combustible materials) | 100 |
| | Safety distance behind (combustible materials) | 100 |
| | Safety distance (Ceiling) | 1100 |
| | Room min. height(depends on connections and therefore from output, star/delta) | 1900 |
| | Installation opening height | 1840 |
| | Installation opening width | 730 |
| Installation opening depth | 730 | |

Technical images

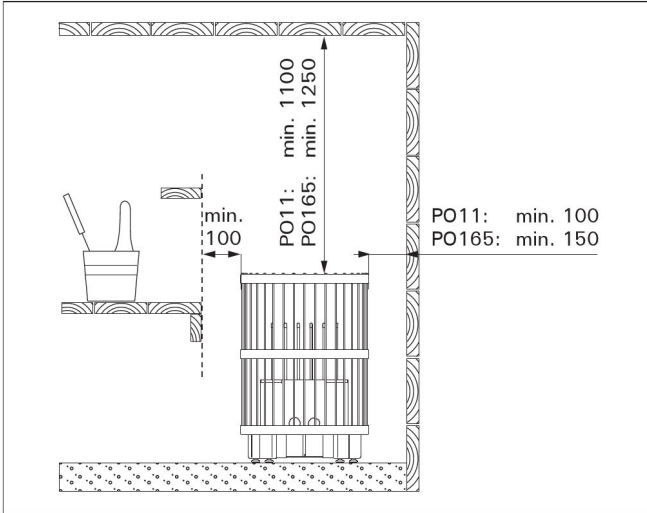


Safety distances (all dimensions in millimeters)




| KIUAS AGGREGAT HEATER OFEN КАМЕНКА KERIS | VASTUKSET VÄRMEELEMENT HEATING ELEMENT HEIZELEMENT НАГРЕВАТЕЛЬНЫЕ ЭЛЕМЕНТЫ KÜTTELEMENT | TEHO EFFEKT OUTPUT LEISTUNG МОЩНОСТЬ VOIMSUS | OSANRO BETECKNING PART NO. TEIL NR. НОМЕР ДЕТАЛИ OSA NR. |
|---|---|---|---|
| PO11 | 1, 2, 6 3, 4, 5 | 2150 W/230 V 1500 W/230 V | ZSP-240 ZSS-110 |
| PO165 | 1, 2, 6 3, 4, 5 | 3000 W/230 V 2500 W/230 V | ZSP-255 ZSP-250 |

We recommend to use only the manufacturer's spare parts.

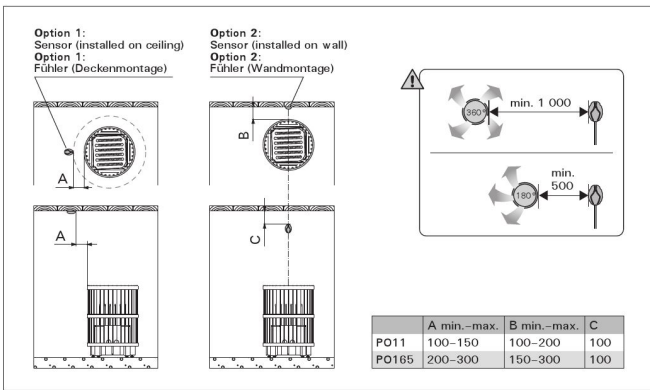

Installing the Temperature Sensor (all dimensions in millimeters)

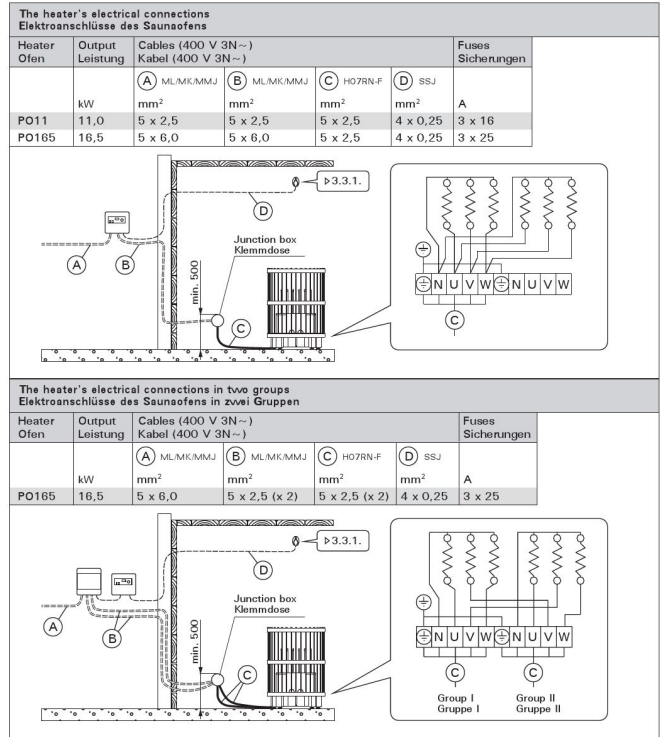

Electrical connections