

Wood burning heater Harvia 36 black

WK360

The Harvia Pro 36 is a perfect wood burning heater for big saunas. Its features ensure that even a larger group of people can enjoy a hearty amount of steam. The generous amount of stones makes it possible to enjoy the stay in the sauna for a long time.



Features

Main material : Steel

H x W x D : 810.0 x 510.0 x 510.0 mm

Net weight (kg) : 65.4

Stone amount (kg) : 60.0

ID	GTIN	Power	Sauna room size min - max m3
WK360	6417659001052		14.0-36.0



Spare parts

Product	ID	Pcs
Furnace grate	ZKIP-10	1
Connection pipe	ZKIP-130	1
Glass for stove door 184*210 mm	ZTS-36	
Ashpan RST Pro	ZKIP-720	
Hinge pin	ZKIP-50	1
Stove body (36)	ZH2-300	1
Harvia mark	ZH1-170	
Packing box for H36	ZH2-180	
Handle for stove + screws	ZKIP-670	1
Handle for ash box	ZKIP-680	
Stove door with glass	ZROST-048	
Air-flow spoiler 36	ZH2-143	1
	ZKIP-155	
Handle and screws, Chrome	SPZKIP-670	
Adjustable legs for LG150/SL	SPZKIP-918	
Air-flow spoiler 36	SPZH2-143	
Hinge pin	SPZKIP-50	
Ashtray black, sauna heaters	SP682	
Cap for smoke hole (Ø 50 mm)	SPZKIP-170	
Glass 184x210x4 mm Stoves 2006-, transparent	SPZTS-36	
Stove door with glass (from 2006)	SP048	
Cast-iron grating 135x290mm, sauna heaters	SPZKIP-10	

Technical details

Technical data	Type / attribute	WK360
Dimensions	Color	Black
	Stone amount (kg)	60
	Product width	510
	Product height	810
	Product depth (mm)	510
	Net weight (kg)	65.4
	Gross weight	67.5
	Package width	580
	Package height	890
Connections	Package depth	560
	Flue connection locations	Back, Top
Safety and installation dimensions	Chimney connection diameter	115
	Safety distance front (non-combustible materials)	500
	Safety distance front (combustible materials)	500
	Safety distance right side (combustible materials)	500
	Safety distance right side non-combustible materials	100
	Safety distance left side (combustible materials)	500
	Safety distance left side non-combustible materials	100
	Safety distance behind (non-combustible materials)	100




Technical details

Technical data	Type / attribute	WK360
	Safety distance behind (combustible materials)	500
	Safety distance (Ceiling)	1250
	Room min. height(depends on connections and therefore from output, star/delta)	2060

Technical images

1.1. Stove Parts


- 1.1. Stove Parts**
- A. Upper connection opening
 - B. Rear connection opening
 - C. Soot opening
 - D. Stove door
 - E. Ash box

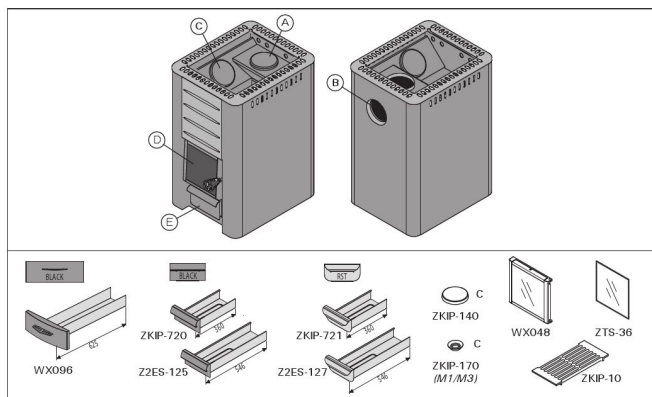

Stove parts. Note! Only use replacement parts recommended by the manufacturer. Unauthorised modification of the stove is prohibited.


3.4. Accessories

- 3.4. Accessories**
- A. Harvía protective sheath WL1500.** Installed on the top of the upper connection opening. When a protective sheath or other protection is used that is not large enough to protect the inflammable materials around the stove from the heat radiation of the fire between the water heating and smoke pipe, you must install a radiation cover around the pipe.
- C. Radiation cover WZ0201130.** Installed around the smoke pipe.
- D. Harvía protective sheath WX017.**
- E. Harvía protective sheath WL400-WL775.**
- F. Harvía protective bedding WX018, WL100.** (not for models 20 RS/LS Pro, 36, 36 Duo, Premium VS, Linear 22 RS/LS, 22 RS/LS Pro).
- G. Harvía protective bedding WL110** (not for models ES Pro/S, ES Pro/S, 22 ES, 22 ES S).
- H. Angle smoke pipe. Different models.**
- I. Lead through flange for smoke pipe WZ020115.** Covers the edges of the flue opening and the sealing in the wall. Made of stainless steel. Consists of two parts to make it useable with differently inclined smoke pipes.
- J. Harvía WZ0201115.** Connected to the flue opening, does not require other seals. The inner side already has a seal.

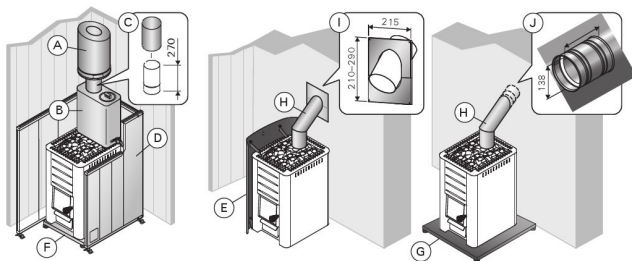


Accessories (all dimensions in millimeters)

	A min.	B min.	C min.	D min.
M1, M2, M3 SL, Classic 140	1200	250	300	300
20 Pro, 20 SL Duo, 20 ES Pro, 20 SL Boiler, Premium V/S, Classic 220 Duo, 20 RS LS Pro	1300	300	300	300
26 Pro, Classic 280	1280	375	375	375
36, 36 Duo	1250	500	500	500
Linear 16, 16	1300	300	350	400
Linear 22, 22 S, Linear 22 RS LS ES, 22 RS LS ES	1265	400	380	500
Linear 28	1380	400	400	500

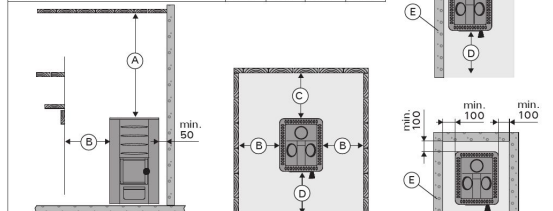

Safety distances (all dimensions in millimeters).

WX017	B min
M1, M2, M3/SL, 20 Pro, 20 SL Duo, 20 ES Pro/S, 20 Boiler, 20 SL Boiler, Premium, Classic 140 SL, Classic 220 Duo	300
26 Pro, Classic 280	375
Linear 16, 16	300
Linear 22/28, Linear 22 ES, 22 ES S, 22 S	400

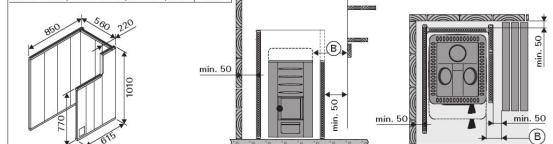

		B min	C min	D min	F	
WL400/WL450	M1, M2, M3-SL 20 Pro SL Duo	50	50	300	30	
WL500/WL550	20 Boiler 30 SL Boiler	62	62	422	30	
WL600/WL650	20 ES Pro-S					
WL700/WL750	26 Pro	73	73	526	30	
WL800/WL850	30, 38 Duo	80	80	700	30	
WL900/WL950	20 ES Pro-S 22 RS SL Duo	62	62	422	30	
WL425/WL475	Linear 16, 16	30	30	400	32	
WL525/WL575	Linear 22, 22					
WL525/WL585	Linear 22, RS SL 22 RS SL S	70	70	500	40	
WL525/WL595	Linear 22 ES, 22 22 ES S					
WL326/WL336						

Safety distances with protective sheaths (all dimensions in millimeters)