

Wood burning heater Harvia Pro 20 RS black

WK200RS

The Harvia 20 RS Pro stove is a popular choice for cottage saunas thanks to its practicality. The right side of the stove features a fixed and easy-to-use 30-litre water tank that heats up the water while the stove is being heated for bathing.



Features

Main material : Steel

H x W x D : 760.0 x 580.0 x 510.0 mm

Net weight (kg) : 65.2

Stone amount (kg) : 40.0

ID	GTIN	Power	Sauna room size min - max m3
WK200RS	6417659017824	24.1 kW	8.0-20.0



Spare parts

Product	ID	Pcs
Furnace grate	ZKIP-10	1
Connection pipe	ZKIP-130	1
Ashpan RST Pro	ZKIP-720	
Seal for water faucet	ZES-260	1
Hinge pin	ZKIP-50	1
Frame with parts for WK200	ZROST-300	1
Harvia mark	ZH1-170	
Handle for stove + screws	ZKIP-670	1
Handle for ash box	ZKIP-680	
Stove door with glass	ZROST-048	
Air-flow spoiler, LS/RS 2019	ZROST-642	
Water tap basket (RS/LS)	ZVS-105	
Nut Dek5280 R1/2 25mm	ZES-250	1
	ZKIP-155	
Handle and screws, Chrome	SPZKIP-670	
Adjustable legs for LG150/SL	SPZKIP-918	
Nut R1/2 25mm	SPZES-250	
Hinge pin	SPZKIP-50	
Extension 25 mm hot water faucet	SPZES-240	
Cap for smoke hole (Ø 50 mm)	SPZKIP-170	
Water container 20 ES, stainless steel	SP035	
Glass 184x210x4 mm Stoves 2006-, transparent	SPZTS-36	
Gasket for hot water faucet	SPZES-260	
Stove door with glass (from 2006)	SP048	
Cast-iron grating 135x290mm, sauna heaters	SPZKIP-10	
Ash box, 20 ES/SL,ESGF	SP681	
Nut Dek5280 R1/2 25mm	ZES-250	

Technical details

Technical data	Type / attribute	WK200RS
	Color	Black
	Power output	24.1 kW
	Stone amount (kg)	40
Dimensions	Product width	580
	Product height	760
	Product depth (mm)	510
	Net weight (kg)	65.2
	Gross weight	67.3
	Package width	745
	Package height	800
	Package depth	515
Connections	Flue connection locations	Back, Top
	Chimney connection diameter	115
Safety and installation dimensions	Safety distance front (non-combustible materials)	300




Technical details

Technical data	Type / attribute	WK200RS
	Safety distance front (combustible materials)	300
	Safety distance right side (combustible materials)	300
	Safety distance right side non-combustible materials	100
	Safety distance left side (combustible materials)	300
	Safety distance left side non-combustible materials	100
	Safety distance behind (non-combustible materials)	100
	Safety distance behind (combustible materials)	300
	Safety distance (Ceiling)	1300
	Room min. height(depends on connections and therefore from output, star/delta)	2060

Technical images

1.1. Stove Parts

- A. Upper connection opening
B. Rear connection opening
C. Soot opening
D. Stove door
E. Ash box

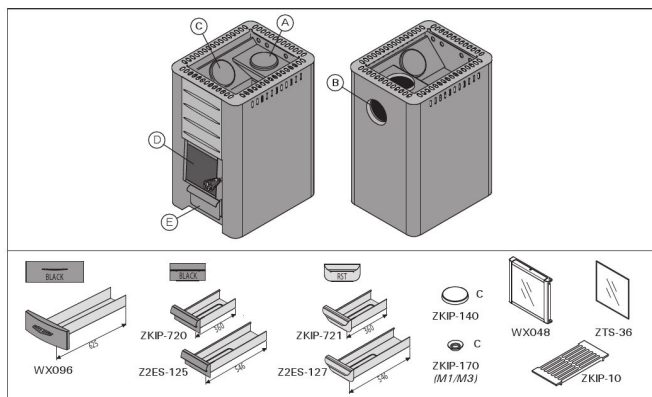

Stove parts. **Note!** Only use replacement parts recommended by the manufacturer. Unauthorised modification of the stove is prohibited.

	A min.	B min.	C min.	D min.
M1, M2, M3/SL, Classic 140	1200	250	300	300
20 Pro, 20 SL Duo, 20 ES Pro/20 Boiler, 20 SL Boiler, Premium VS, Classic 220 Duo, 20 RS/LS Pro	1300	300	300	300
26 Pro, Classic 280	1280	375	375	375
36, 36 Duo	1250	500	500	500
Linear 16, 16	1300	300	350	400
Linear 22, 22 S, Linear 22 RS/LS ES, 22 RS/LS ES	1265	400	380	500
Linear 28	1380	400	400	500


Safety distances (all dimensions in millimeters)

WX017	B min.
M1, M2, M3/SL, 20 Pro, 20 SL Duo, 20 ES Pro/S, 20 Boiler, 20 SL Boiler, Premium, Classic 140 SL, Classic 220 Duo	300
26 Pro, Classic 280	375
Linear 16, 16	300
Linear 22/28, Linear 22 ES, 22 ES S, 22 S	400

Safety distances with protective sheaths (all dimensions in millimeters)

3.4. Accessories

- A. Harvia steel chimney WHP1500.
B. Water heater VL22L. Installed on the top of the upper connection opening. When a protective sheath or other protection is used that is not large enough to protect the inflammable materials around the stove from the heat radiation of the pipe between the water heater and smoke flue, you must install a radiation cover around the pipe.
C. Radiation cover WZ020130. Installed around the smoke pipe.
D. Harvia protective sheath WX017.
E. Harvia protective sheath WL400-WL775.
F. Harvia protective bedding WX018, WL100. (not for models 20 RS/LS Pro, 36, 36 Duo, Premium VS, Linear 22 RS/LS, 22 RS/LS S).
G. Harvia protective bedding WL110 (not for models 20 ES Pro/S, Linear 22 ES, 22 ES S).
H. Angle smoke pipe. Different models.
I. Lead-through flange for smoke pipe WZ020115. Covers the edges of the flue opening and the sealing in the wall. Made of stainless steel. Consists of two parts to make it useable with differently inclined smoke pipes.
J. Masonry connector WZ011115. Connected to the flue opening, does not require other seals. The inner side already has a seal.

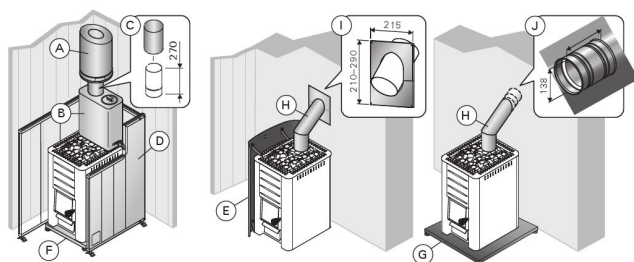

Accessories (all dimensions in millimeters)